

AIR DRYER VALVE



Tyre Inflator Solenoid Valve


Features :

- Wide range of coil voltages.
- Continuous duty cycle.
- Low temperature of operation.
- Noiseless performance.
- Coil can be rotated by 360°.



Technical Specifications :

| | | |
|------------------------------|---------------------------------|----|
| Model | K/ADRV/12 | |
| Medium | Filtered compressed air | |
| Port Size | 1/2" BSP (F) | |
| Ambient / Medium temperature | 5° - 60° C | |
| Orifice (NW) | 12 | |
| Operating pressure (bar) | 2 - 16 | |
| Flow rate (Ltr / Min) | 1250 | |
| Electrical Parameters : | | |
| Voltage (V) ± 10% | AC | DC |
| | 230 | 24 |
| Power Consumption (Watts) | 8 | 6 |
| Duty Cycle | Continuous | |
| Type of coil protection | IP67/IP65 | |
| Class of insulation | Class - F | |
| Materials of construction | Aluminum, Brass, SS 430, Copper | |

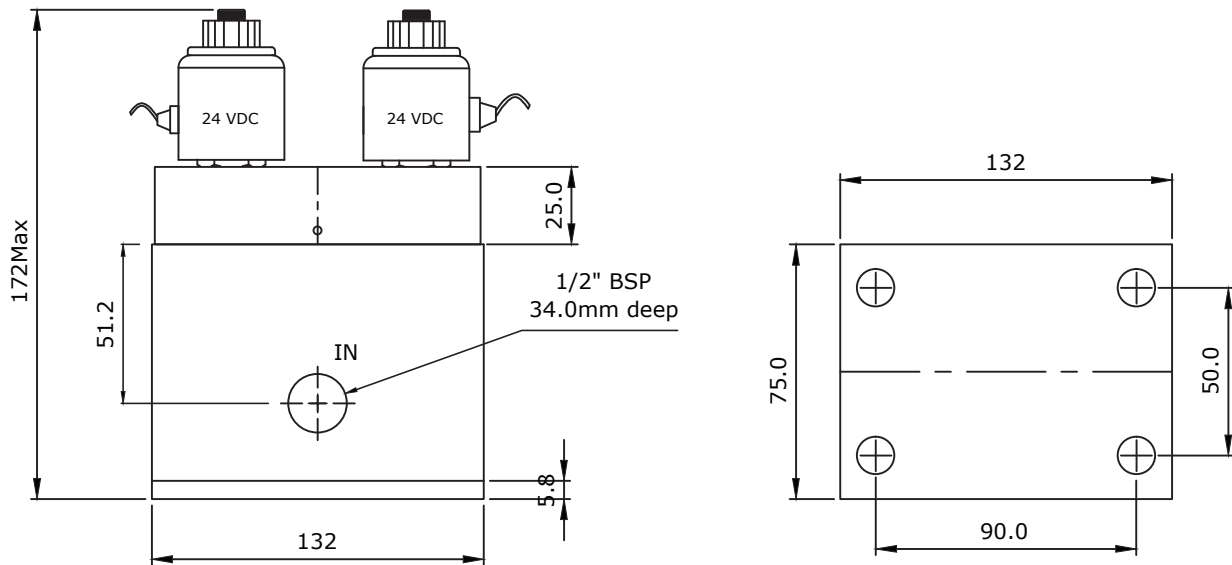

Manufactured by :

Kushako India

Office : 490, Narayan Peth, Opp. Pune Marathi Granthalaya, Pune - 411030. (Maharashtra), Website : www.kushakoindia.com
 Works : Sr.No. 25/1A, Village Nanded, Sinhgad Road, Tal - Haveli, Dist. Pune -411041

Tel. No : 901169077 / 7620674777

E-mail : kushako.india@gmail.com / kushakoindia1992@gmail.com

